
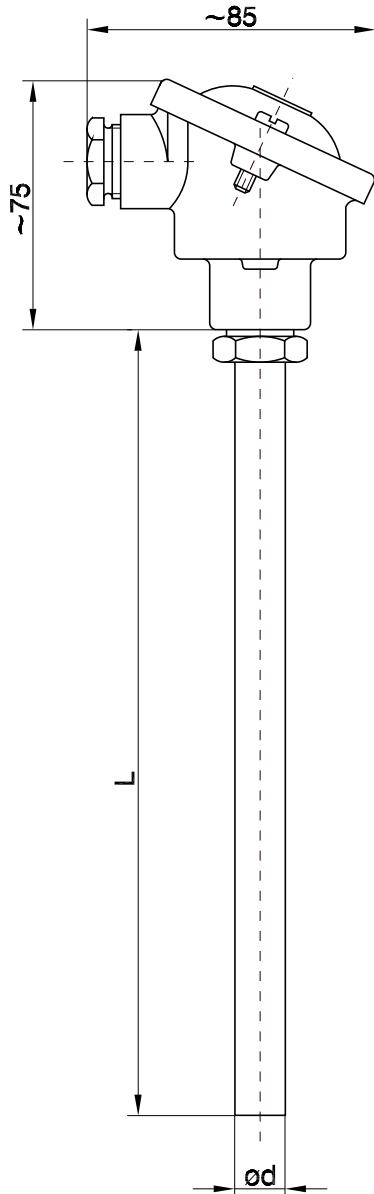


# Thermocouples with connection head Series 240



Thermocouple with a metallic protective tube outside, implementations with flange or adjustable thread joint are deliverable ( → chapter parts and accessories)

### Construction

Basic implementation  
EX-implementation

### Connection head

Form B according DIN 43 729  
Form BUZ for explosion-proof design according DIN 43 729  
on inquiry

### Protection classification

IP 54 according DIN 60529  
on inquiry

### Application temperature

up to +800 °C

### Thermo junction

J (Fe-CuNi) DIN EN 60584  
K (NiCr-Ni) DIN EN 60584  
on inquiry

### Number of Thermo junction

1 thermocouple  
2 thermocouples

### Protective tube material

1.4571  
on inquiry

### Protective tube diameter d

15 mm  
on inquiry

### Nominal length L

on inquiry