


Resistance thermometers  
Penetration sensor  
Series 320

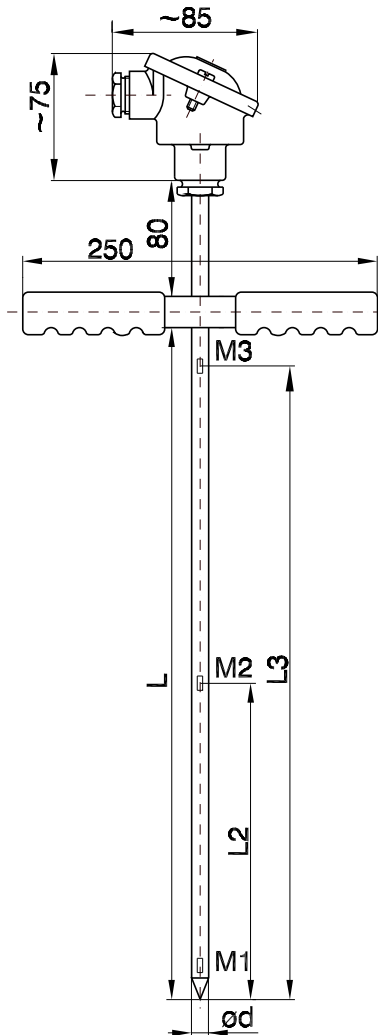

Temperature measurement and monitoring in hay- and straw-stack, several measuring points are available

**Connection head**

Form B according DIN 43 729  
on inquiry

**Protection classification**

IP 54 according DIN 60529  
on inquiry

**Application temperature**

-35 °C to +100 °C

**Temperature sensor**

1 x Pt 100 Class A DIN EN 60751  
1 x Pt 100 Class B DIN EN 60751  
1 x Pt 500 Class B  
1 x Pt 1000 Class B  
on inquiry

**Number of temperature measuring points**

1  
2  
3

**Circuitry**

2 wire circuit  
3 wire circuit (max. 2 measuring points)  
4 wire circuit (max. 1 measuring points)

**Protective tube material**

1.4571  
on inquiry

**Sensor length L**

2000 mm  
on inquiry

**Distance of the measuring points  $L_2$  ,  $L_3$**

on inquiry

Resistance thermometers

Penetration sensor

Series 320

---

**Diameter d**

12 mm

14 mm