
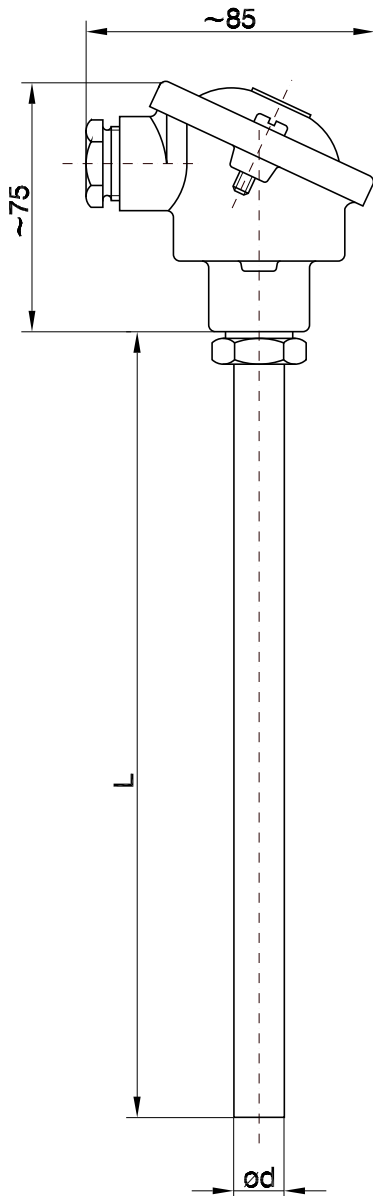


## Resistance thermometers with connection head Series 340



Measuring the temperature in pipelines or containers; on request, implementations with flange or with adjustable thread joint are deliverable ( → chapter parts and accessories)

### Construction

- Basic implementation
- GL-implementation
- EX-implementation

### Connection head

- Form B according DIN 43 729
- Form BUZ for explosion-proof design according DIN 43 729 on inquiry

### Protection classification

- IP 54 according DIN 60529
- on inquiry

### Application temperature

- up to +380 °C for GL-Design
- 200 to +600 °C
- 50 to +400 °C
- on inquiry

### Temperature sensor

- 1 x Pt 100 Class A DIN EN 60751
- 1 x Pt 100 Class B DIN EN 60751
- 2 x Pt 100 Class A DIN EN 60751
- 2 x Pt 100 Class B DIN EN 60751
- on inquiry


### Circuitry

- 2 wire circuit
- 3 wire circuit
- 4 wire circuit

### Protective tube material

- 1.4571
- on inquiry

Resistance thermometers  
with connection head  
Series 340



**Protective tube diameter d**

15 mm  
on inquiry

**Nominal length L**

on inquiry