


Cable sensors
Cable sensors with explosion proof
Model series K10T

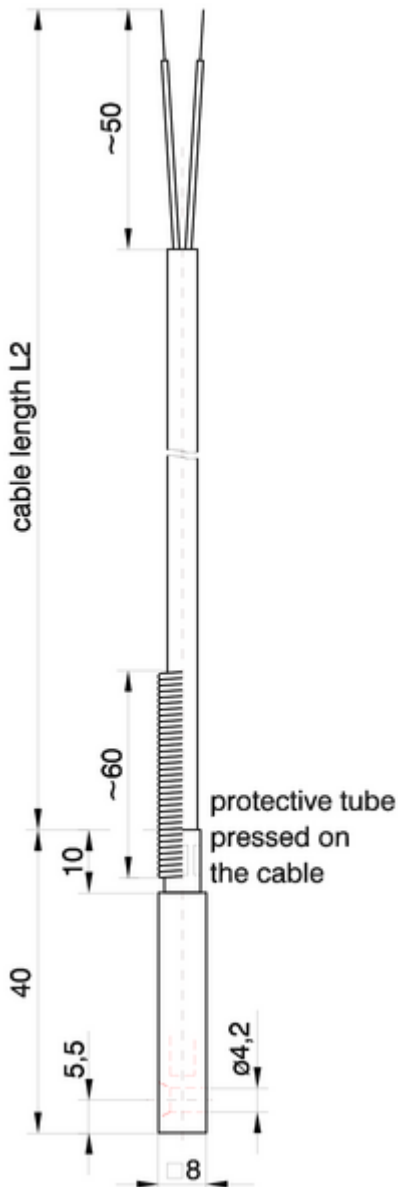

Thermocouple-cable sensor for surface measurement

Please declare desired temperature range for case of application!

Construction

- Basic implementation
- Ex-implementation (intrinsically safe)

Application temperature

on inquiry, depends on sensor and protective tube material

Thermo junction

- J (Fe-CuNi) DIN EN 60584
- K (NiCr-Ni) DIN EN 60584
- on inquiry

Number of Thermo junction

- 1 thermocouple
- 2 thermocouples

Protective tube material

- stainless steel
- brass

Type of compensating cable

on inquiry

Cable length L2

on inquiry min. 100 mm

Bend protection

- without
- with spiral spring

Connector

- free ends
- connector on inquiry