


Cable sensors
Without attaching parts
Model series K12T

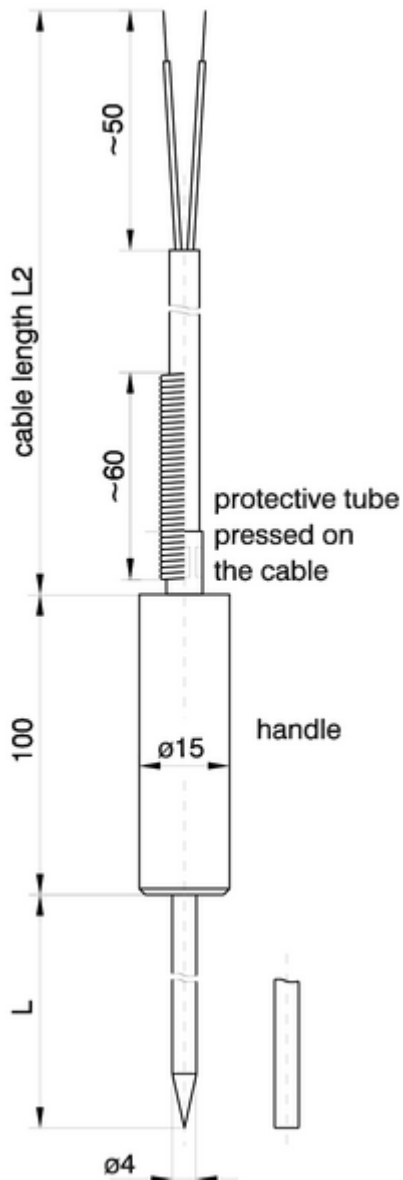

Thermocouple - cable sensor to pierce in

Please declare desired temperature range for case of application!

Application temperature

on inquiry, depends on sensor and protective tube material

Thermo junction

J (Fe-CuNi) DIN EN 60584

K (NiCr-Ni) DIN EN 60584

on inquiry

Number of Thermo junction

1 thermocouple

2 thermocouples

Handle material

stainless steel

PTFE (Teflon, max. 260°C)

Protective tube form

planar

with penetration point

Protective tube material

stainless steel

on inquiry

Protective tube diameter d

4 mm

on inquiry

Sensor length L

on inquiry 20 ... 190 mm

Type of compensating cable

on inquiry

Cable length L2

on inquiry min. 100 mm

Bend protection

without

with spiral spring

Connector

free ends

connector on inquiry